



نحوه شناساندن دستگاه  
آیکو دیاگ به کامپیوتر

● برای شناساندن دستگاه اینترنت فیس به کامپیوتر حتما برنامه **OFFICE** بر روی کامپیوتر نصب باشد سپس مراحل ذیل مطابق با عکس اجرا گردد .

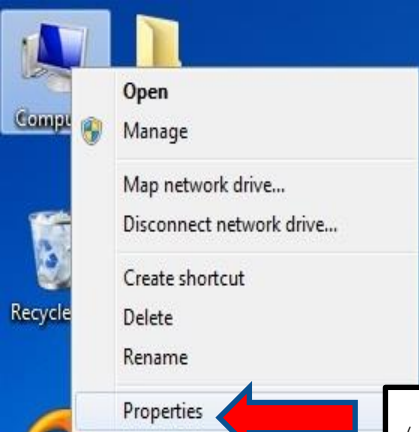

بر روی my computer کلیک راست می کنیم سپس گزینه ی properties را انتخاب می نمایم .

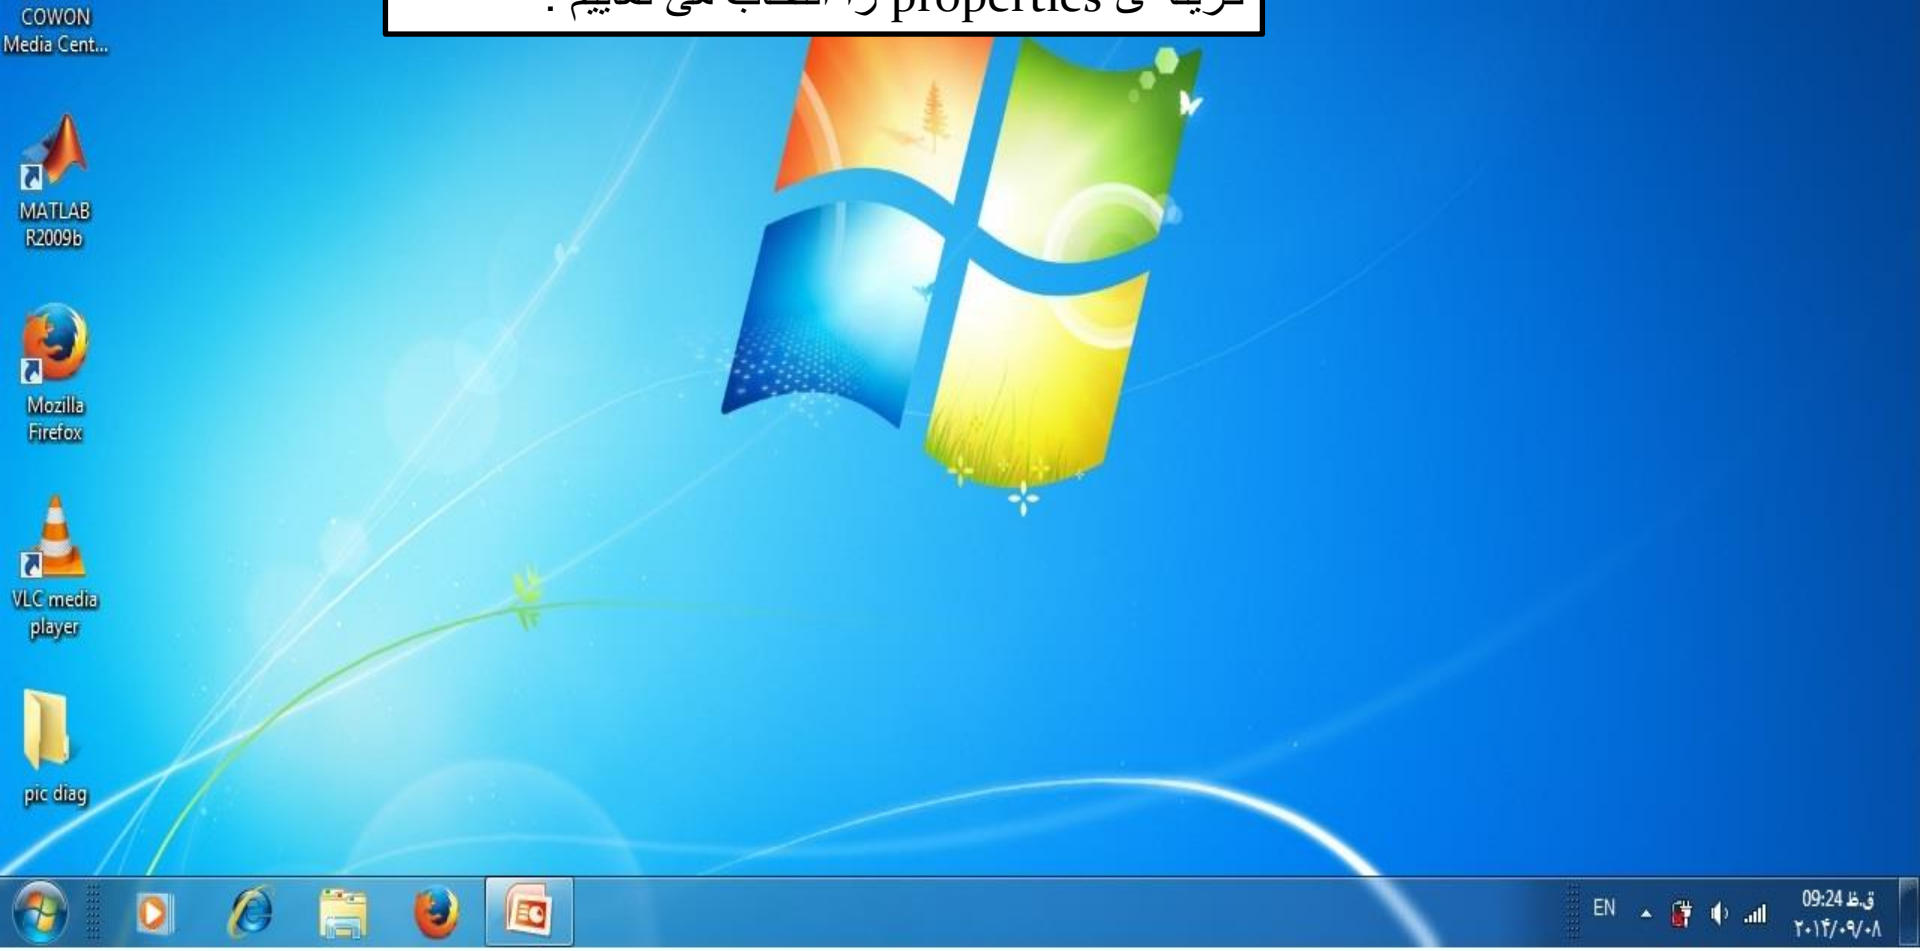

Control Panel Home

Control Panel > All Control Panel Items > System


Search Control Panel

View basic information about your computer

**device manager** در پنجره باز شده گزینه را انتخاب می نمایم .

Copyright © 2009 Microsoft Corporation. All rights reserved.

System

Manufacturer:	DriverPack Solution
Model:	ASUSTeK N80Vb
Rating:	 Windows Experience Index
Processor:	Intel(R) Core(TM)2 Duo CPU T6400 @ 2.00GHz 2.00 GHz
Installed memory (RAM):	4.00 GB (3.00 GB usable)
System type:	32-bit Operating System
Pen and Touch:	No Pen or Touch Input is available for this Display

DriverPack Solution support

Website:	<a href="#">Online support</a>
----------	--------------------------------


Computer name, domain, and workgroup settings

Computer name:	nami-PC	<a href="#">Change settings</a>
----------------	---------	---------------------------------

See also

- Action Center
- Windows Update
- Performance Information and Tools




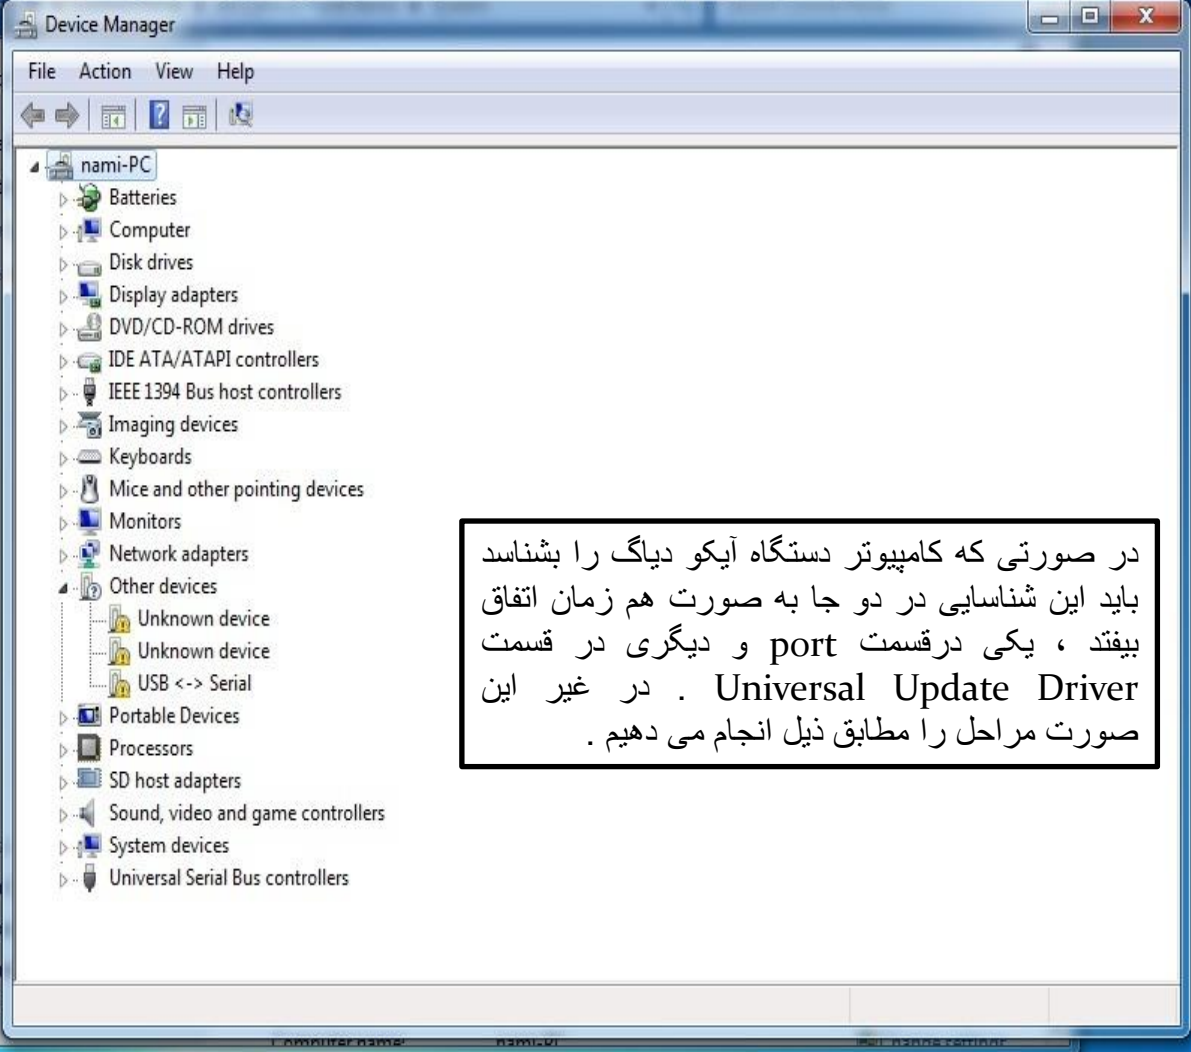

در صورتی که کامپیوتر دستگاه آی‌کیو دی‌اگ را بشناسد باید این شناسایی در دو جا به صورت هم زمان اتفاق بیفتد ، یکی در قسمت port و دیگری در قسمت Universal Update Driver . در غیر این صورت مراحل را مطابق ذیل انجام می دهیم .





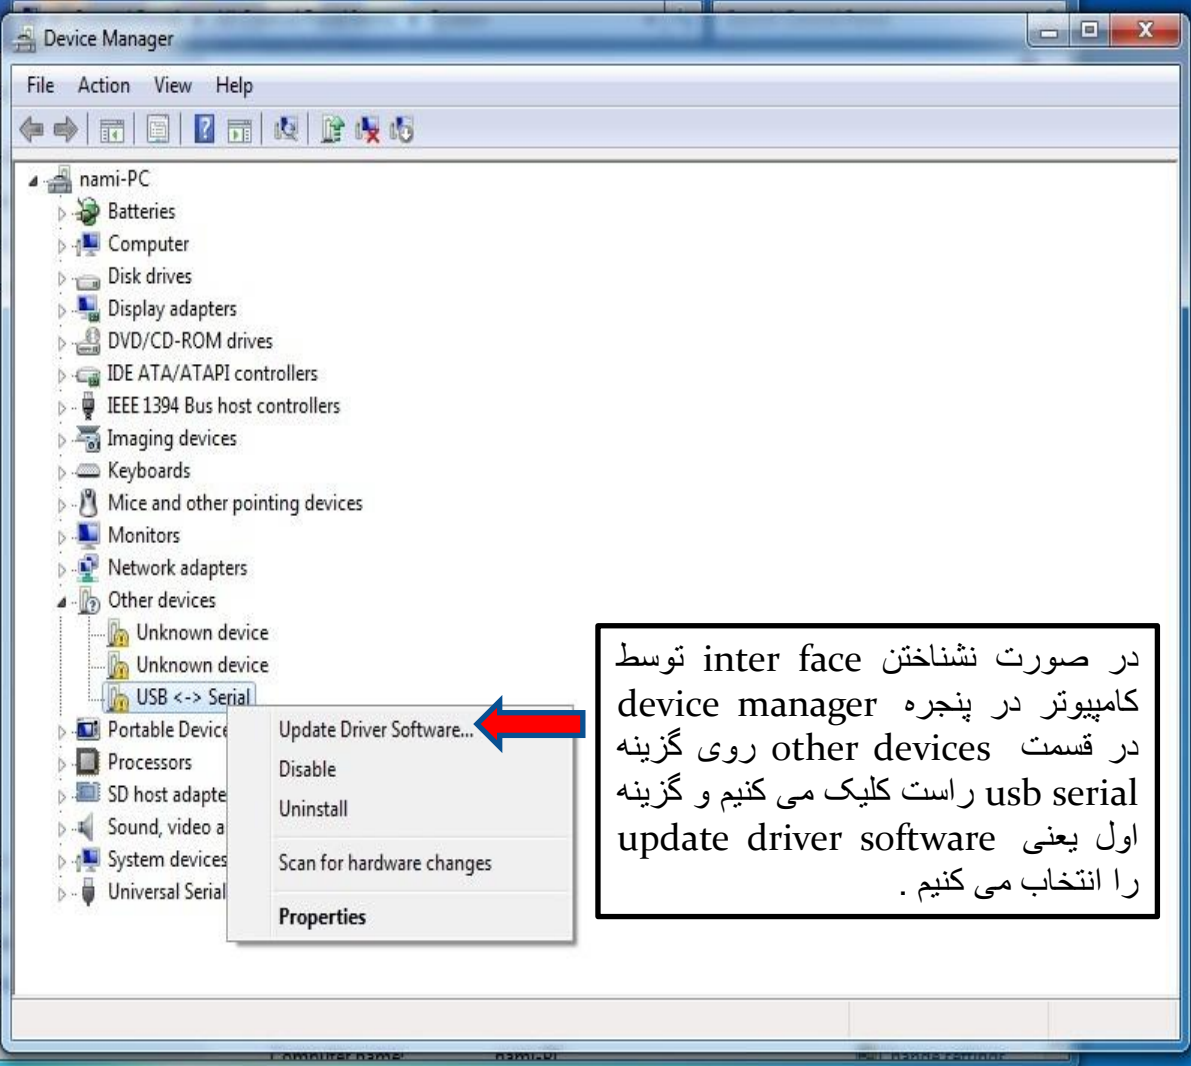

در صورت نشناختن interface توسط کامپیوتر در پنجره device manager در قسمت other devices روی گزینه usb serial راست کلیک می کنیم و گزینه اول یعنی update driver software را انتخاب می کنیم .



Device Manager

File Action View Help

Update Driver Software - USB <-> Serial

How do you want to search for driver software?

- ➔ Search automatically for updated driver software  
Windows will search your computer and the Internet for the latest driver software for your device, unless you've disabled this feature in your device installation settings.
- ➔ Browse my computer for driver software  
Locate and install driver software manually.

Cancel

در این پنجره روی گزینه Browse my computer for driver software کلیک می کنیم.

VLC media player


BANK

DC14001 CASE FINAL

IKCODIAG...

07:11 ق.ظ

۲۰۱۴/۰۹/۰۸

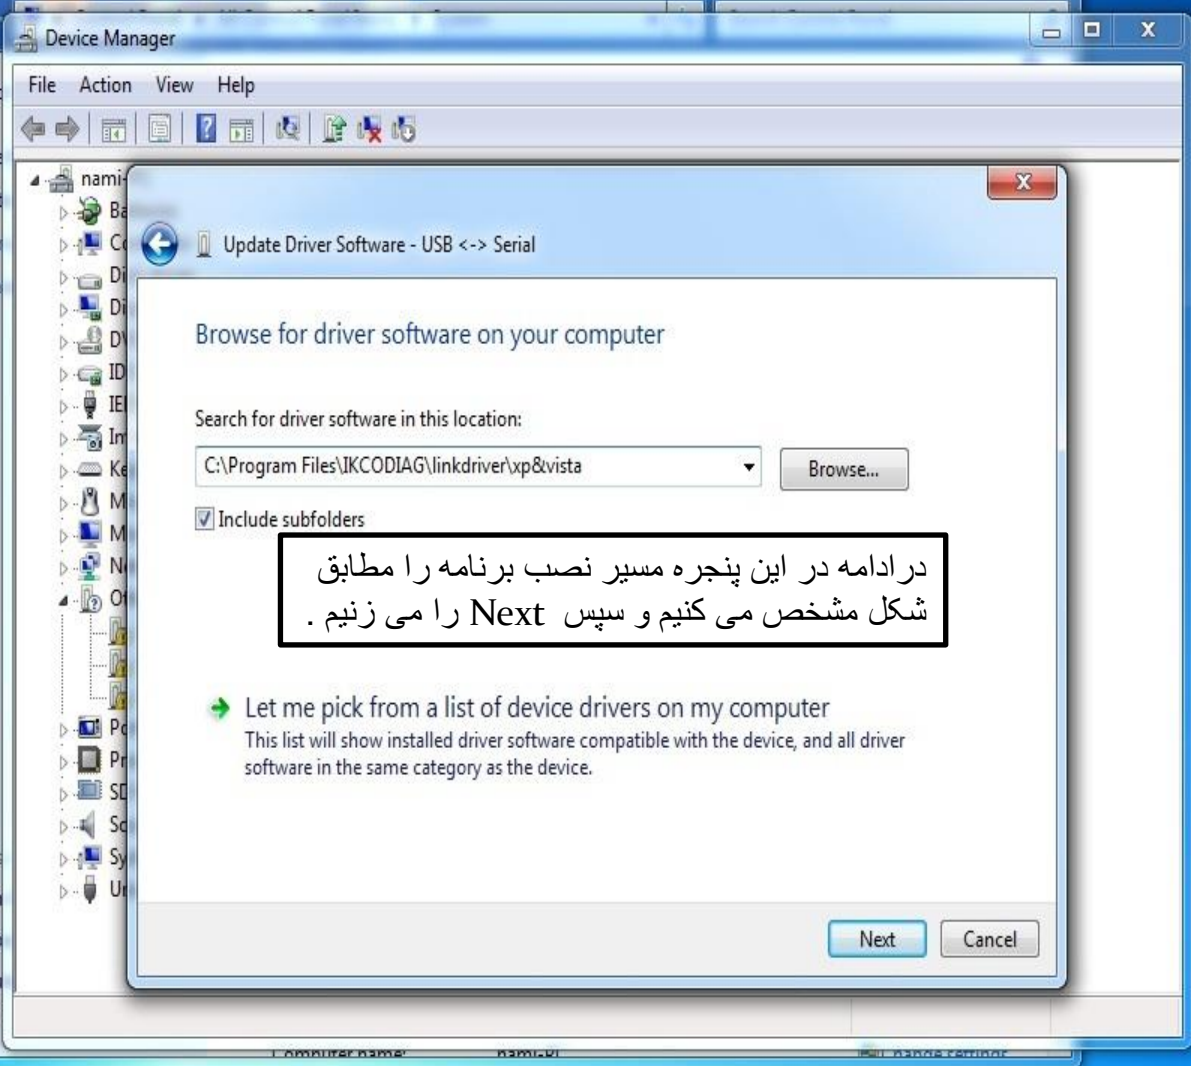

در ادامه در این پنجره مسیر نصب برنامه را مطابق شکل مشخص می کنیم و سپس Next را می زنیم.

Let me pick from a list of device drivers on my computer  
This list will show installed driver software compatible with the device, and all driver software in the same category as the device.

Next Cancel





Device Manager

File Action View Help

Update Driver Software - USB <-> Serial

Installing driver software...

سپس برنامه شروع به شناسایی و نصب می کند

VLC media player

BANK

DCI4001 CASE FINAL

IKCODIAG...

07:13 قظ ۲۰۱۴/۰۹/۰۸



Device Manager

File Action View Help


Update Driver Software - USB <-> Serial

Installing driver software...

Windows Security

Windows can't verify the publisher of this driver software

- Don't install this driver software  
You should check your manufacturer's website for updated driver software for your device.
- Install this driver software anyway  
Only install driver software obtained from your manufacturer's website or disc. Unsigned software from other sources may harm your computer or steal information.



در صورتی که در هنگام نصب و شناسایی پنجره ذیل ظاهر شد گزینه Install this driver software anyway را انتخاب نمایید .





Computer

a4tech

Recycle Bin

COWON  
Media Cent...

MATLAB  
R2009b

Mozilla  
Firefox

VLC media  
player

Device Manager

File Action View Help

Update Driver Software - IKGODIAG Link V1.1

Windows has successfully updated your driver software

Windows has finished installing the driver software for this device:

IKGODIAG Link V1.1

در این پنجره همانطور که ملاحظه می کنید Inter face به سیستم شناسانده شده است و close را می زنیم .

Close





The screenshot shows the Windows Device Manager window. The tree view is expanded to 'Universal Serial Bus controllers'. A red arrow points to the device 'IKGODIAG Link V1.1'. Below it, several 'Intel(R) ICH9 Family USB Universal Host Controller' devices are listed with IDs ranging from 2934 to 2939, followed by two 'Intel(R) ICH9 Family USB2 Enhanced Host Controller' devices with IDs 293A and 293C. At the bottom of the list are 'USB Mass Storage Device' and multiple 'USB Root Hub' entries.

همانطور که مشاهده می کنیم در پنجره Device manager در قسمت Universal Serial Bus controllers آیگو دیاگ شناخته شده است .

Computer

a4tech

Recycle Bin

COWON Media Cent..

MATLAB R2009b

Mozilla Firefox

VLC media player

BANK

DC14001 CASE FINAL

IKGODIAG...

sa7

Taskbar with icons for Start, VLC media player, Internet Explorer, File Explorer, Mozilla Firefox, and other applications. System tray on the right shows the time 07:17 and date ۲۰۱۲/۰۹/۰۸.





Device Manager

File Action View Help

- DVD/CD-ROM drives
- IDE ATA/ATAPI controllers
- IEEE 1394 Bus host controllers
- Imaging devices
- Keyboards
- Mice and other pointing devices
- Monitors
- Network adapters
- Other devices
  - Unknown device
  - Unknown device
  - USB Serial Port
- Portable Device
- Processors
- SD host adapt
- Sound, video
- System device
- Universal Serial Bus controllers
  - IKGODIAG
  - Intel(R) ICH9 Family USB Universal Host Controller - 2934
  - Intel(R) ICH9 Family USB Universal Host Controller - 2935
  - Intel(R) ICH9 Family USB Universal Host Controller - 2936
  - Intel(R) ICH9 Family USB Universal Host Controller - 2937
  - Intel(R) ICH9 Family USB Universal Host Controller - 2938
  - Intel(R) ICH9 Family USB Universal Host Controller - 2939
  - Intel(R) ICH9 Family USB2 Enhanced Host Controller - 293A


Update Driver Software...  
 Disable  
 Uninstall  
 Scan for hardware changes  
 Properties

Launches the Update Driver Software Wizard for the selected device.

ولی همچنان در قسمت USB Serial Port آیکو دیاک شناسایی نشده است ، که مراحل قبل مجددا مطابق با مراحل زیر تکرار می گردد .


روی گزینه USB Serial Port کلیک راست می کنیم و گزینه Update Driver Software را انتخاب می نماییم .



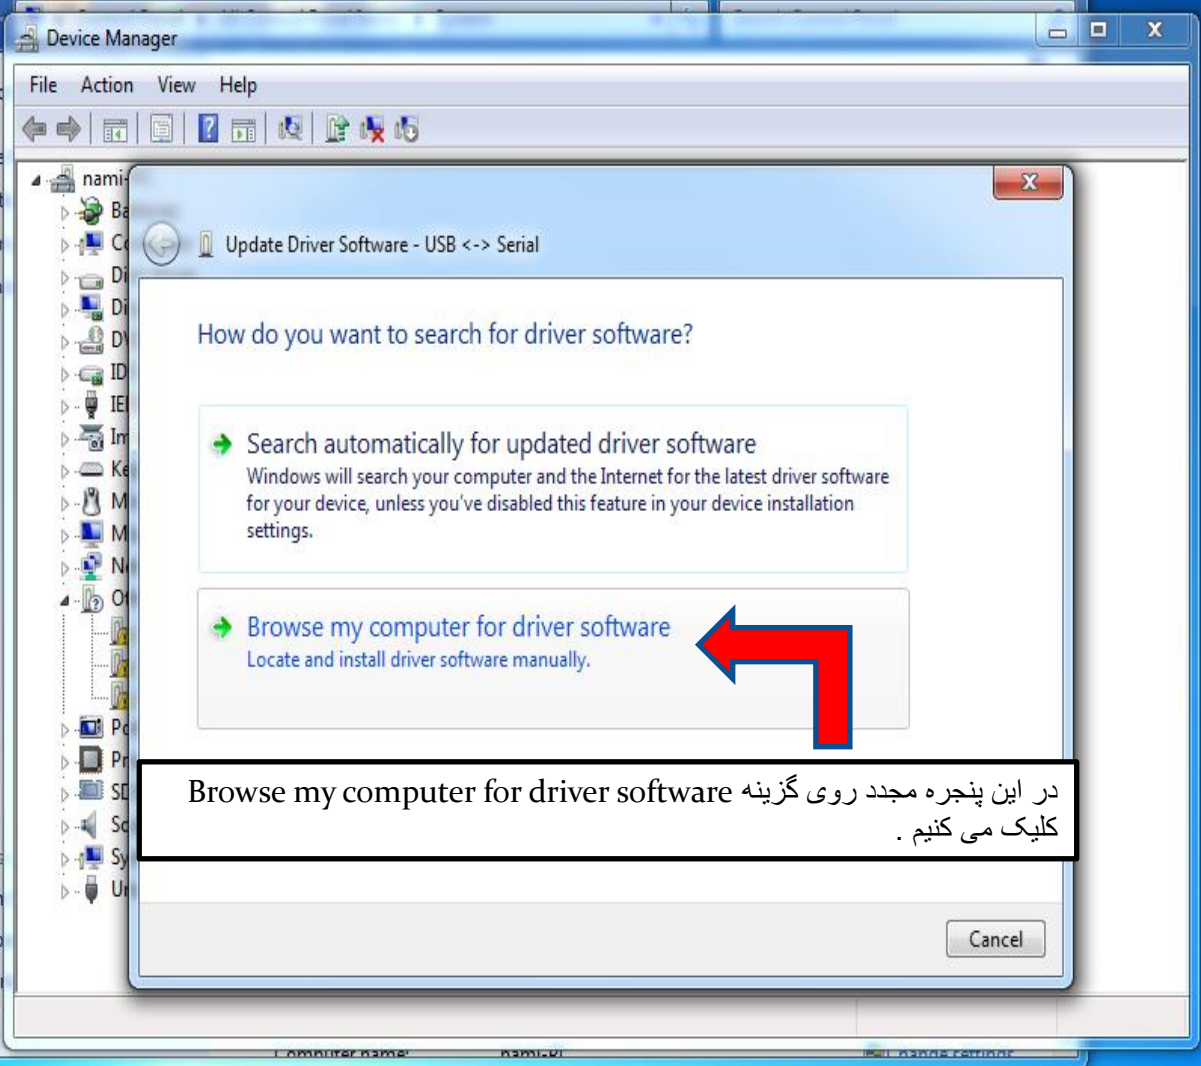

در این پنجره مجدد روی گزینه Browse my computer for driver software کلیک می کنیم.



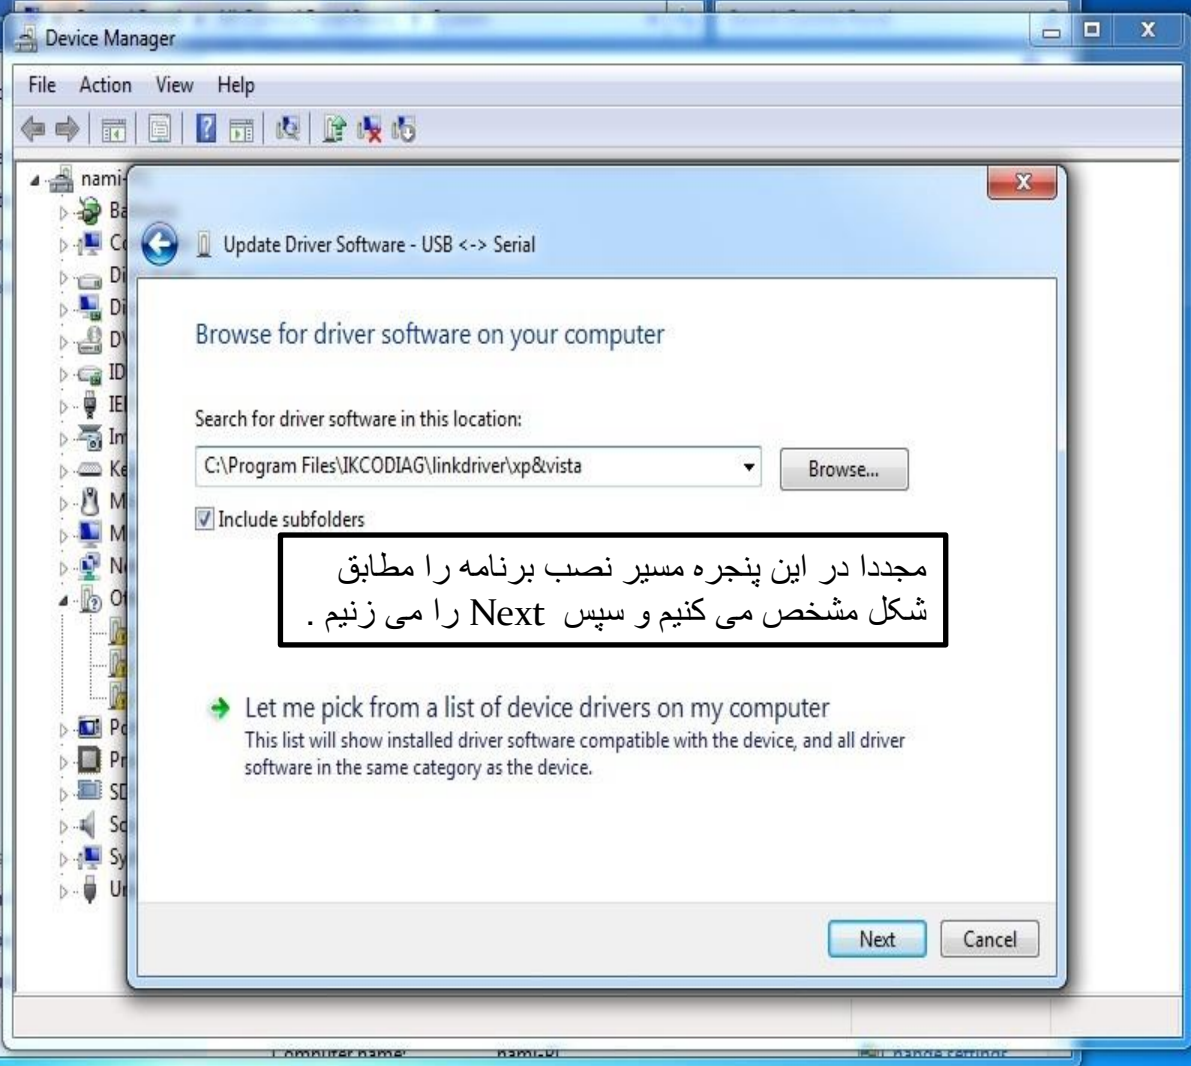

مجددا در این پنجره مسیر نصب برنامه را مطابق شکل مشخص می کنیم و سپس Next را می زنیم .

➔ Let me pick from a list of device drivers on my computer  
This list will show installed driver software compatible with the device, and all driver software in the same category as the device.

Next Cancel





Device Manager

File Action View Help

Update Driver Software - USB <-> Serial

Installing driver software...

سپس برنامه شروع به شناسایی و نصب می کند

VLC media player

BANK

DCI4001 CASE FINAL

IKCODIAG...

07:13 قظ ۲۰۱۴/۰۹/۰۸





Device Manager

File Action View Help


Update Driver Software - USB <-> Serial

Installing driver software...

Windows Security

Windows can't verify the publisher of this driver software

- Don't install this driver software  
You should check your manufacturer's website for updated driver software for your device.
- Install this driver software anyway  
Only install driver software obtained from your manufacturer's website or disc. Unsigned software from other sources may harm your computer or steal information.



در صورتی که در هنگام نصب و شناسایی پنجره ذیل ظاهر شد گزینه Install this driver software anyway را انتخاب نمایید .





Computer

a4tech

Recycle Bin

COWON  
Media Cent...

MATLAB  
R2009b

Mozilla  
Firefox

VLC media  
player

Device Manager

File Action View Help

Update Driver Software - IKGODIAG Link V1.1

Windows has successfully updated your driver software


Windows has finished installing the driver software for this device:

IKGODIAG Link V1.1

در این پنجره همانطور که ملاحظه می کنید Inter face به سیستم شناسانده شده است و close را می زنیم .

Close



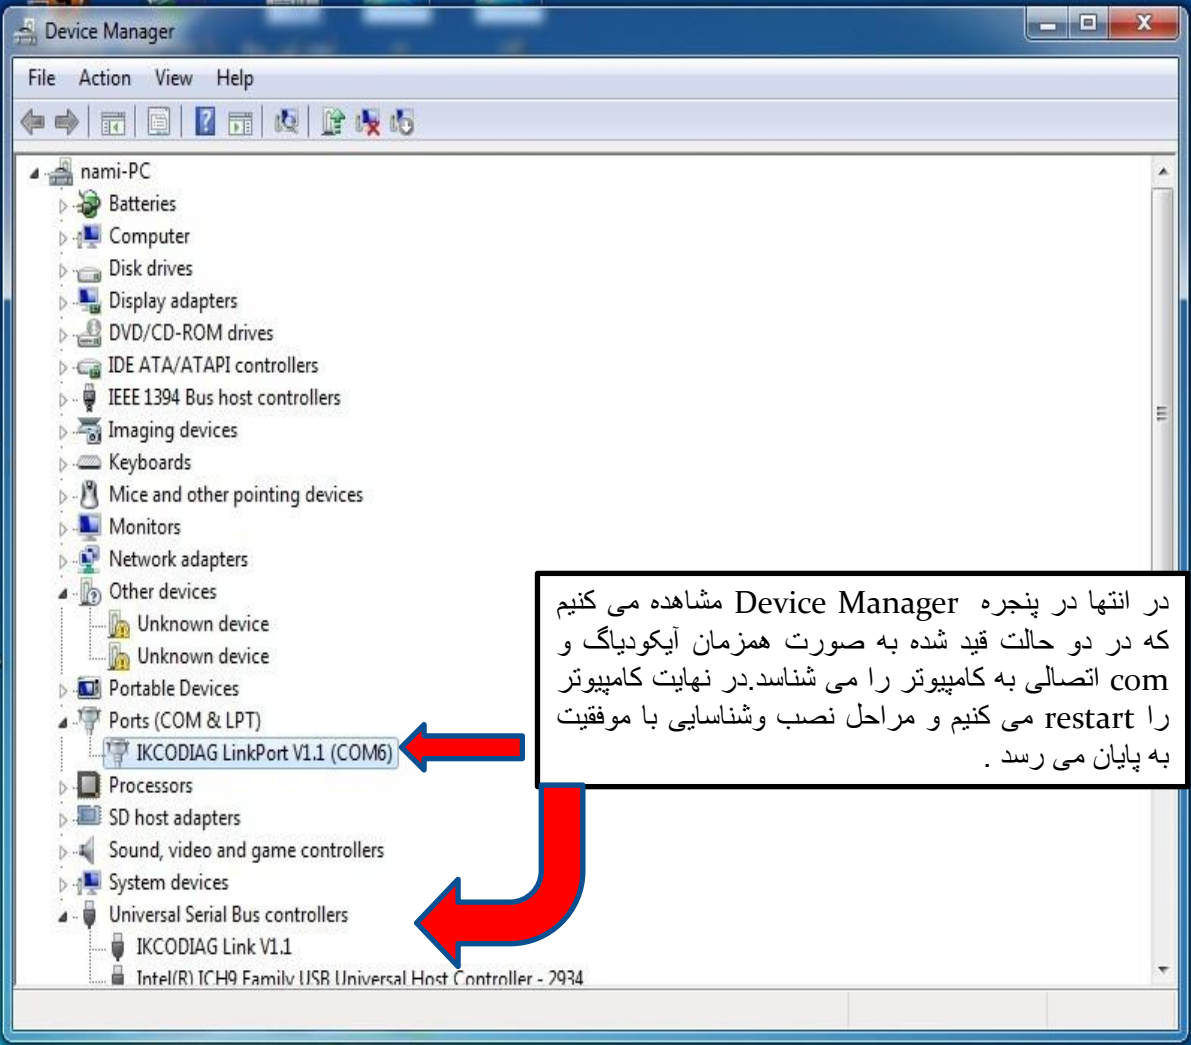

در انتها در پنجره Device Manager مشاهده می کنیم که در دو حالت قید شده به صورت همزمان آیکودیگ و com اتصالی به کامپیوتر را می شناسد. در نهایت کامپیوتر را restart می کنیم و مراحل نصب و شناسایی با موفقیت به پایان می رسد .

