


Circuit diagram

Stereo system

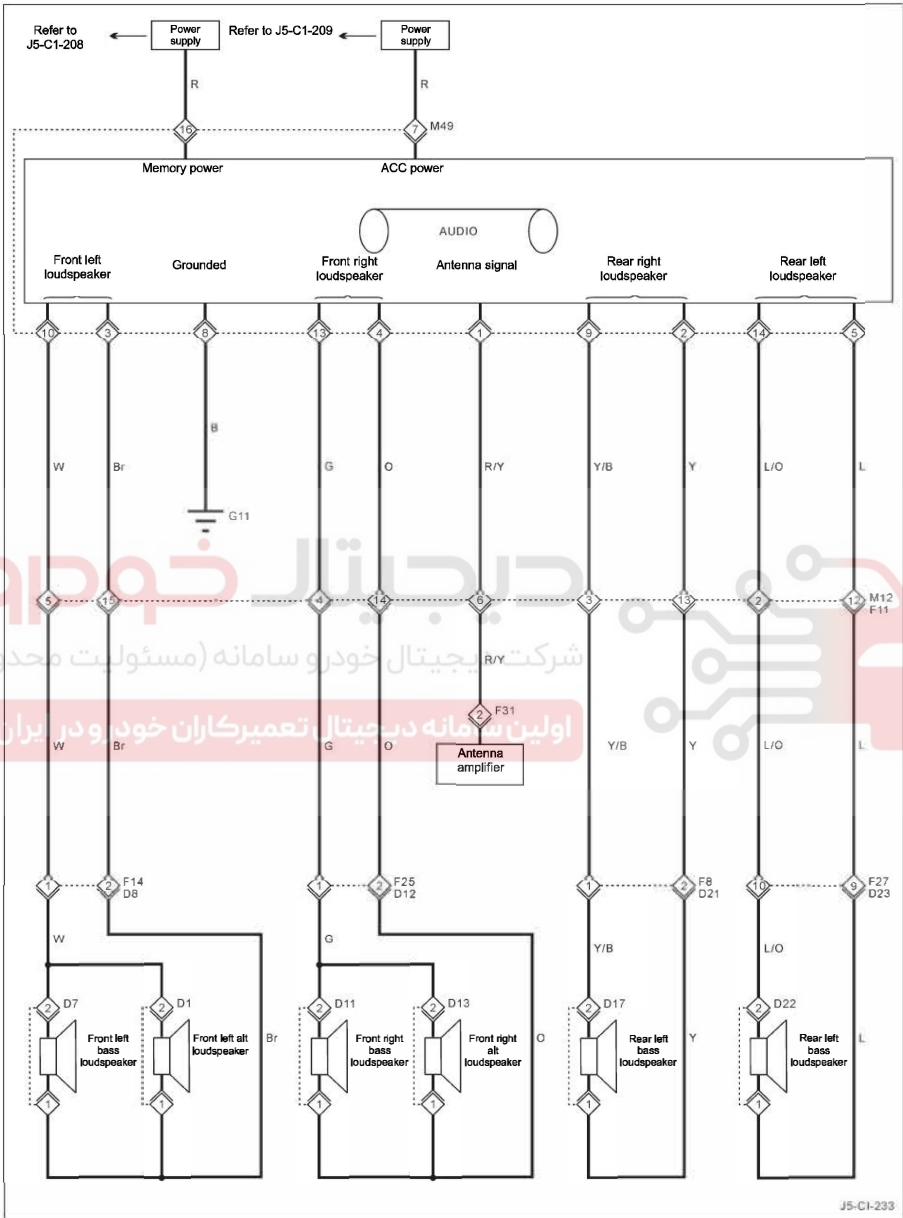

Circuit diagram

◇: harness plug

No.	No.	Description of harness plug
F8	D21	Vehicle frame harness – rear left door harness (below the left post B)
F14	D8	Vehicle frame harness – front left door harness (below the left post A)
F25	D12	Vehicle frame harness – front right door harness (below the right post A)
F27	D23	Vehicle frame harness – rear right door harness (below the right post B)
M12	F11	Main harness –vehicle frame harness (below and on the left of dashboard)

□: switch and electrical device

No.	Description	Position
D1	To front left alt horn	Front left door harness
D7	To front left bass horn	Front left door harness
D11	To front right bass horn	Front right door harness
D13	To front right alt horn	Front right door harness
D17	To rear left bass horn	Rear left door harness
D22	To rear right bass horn	Rear right door harness
F31	To antenna amplifier	Vehicle frame harness
M49	To radio player	Main harness